



328 Skid Steer Loader



Engine	Perkins
Gross Power	19.7 kW (26.4 hp) @ 3,000 rpm
Net Power	18.6 kW (24.9 hp) @ 3,000 rpm
Breakout Force	10 kN
Rated Load	235 kg
Bucket Capacity	0.12 m ³
Operating Weight	1,350 kg

328 Skid Steer Loader



ENGINE

Emission Regulation	Tier 3 / Stage III
Make & Model	Perkins403D-11
Gross Power	19.7 kW (26.4 hp) @ 3,000 rpm
Net Power	18.6 kW (24.9 hp) @ 3,000 rpm
Peak Torque	91 N · m
Number of Cylinders	3
Displacement	1.12 L
Cooling Type	Water

ELECTRICAL SYSTEM

System Voltage	12 V
Alternator Output	55 amps

CHAIN TANK

Drive Chain Size	80 Hs
------------------	-------

Track

Track Type	Rubber
Track Size	230*72-41LAB

HYDRAULIC SYSTEM

System Type	open
Standard Flow	32.8 L/min
Optional High Flow	51.9 L/min
Traveling Hydrostatic Pressure	21 MPa
Working Hydrostatic Pressure	21MPa
Hydraulic Cycle Time, total	8.8 s
Raise	2.9 s
Dump	2.7 s
Lower (float down)	3.2 s

OPERATING WEIGHT

Operating Weight	1,350 kg
------------------	----------

PERFORMANCE

Static Tipping Load	650 kg
Rated Load	235 kg
Boom Breakout Force	18 kN
Bucket Breakout Force	10 kN
Dump Clearance at Full Height Discharge	1,500 mm
Dump Reach at Full Height Discharge	568 mm
Maximum Dump Angle at Full Height	39.8°
Maximum Hinge Pin Height	1,954 mm
Bucket Rollback at Ground Level	29°
Ground Clearance	152 mm
Angle of Departure	32°
Front Clearance Radius	1,336 mm

SERVICE CAPACITIES

Fuel Tank	49 L
Engine Oil	12 L
Cooling System	6 L
Hydraulic Reservoir	54 L
Hydraulic System Total	60 L
Chain Tanks, Each	4 L

STANDARD EQUIPMENT



- General Bucket - 0.12 m³
- Control Safety Interlock
- Boom Interlock
- Quick Coupler
- Auxiliary High Flow -51.9 L/min

OPTIONAL EQUIPMENT

- Flow Standard - 40.1 L/min

OPTIONAL ATTACHMENTS

- 4 in 1 Bucket - 0.12 m³
- Mini Hydraulic Hammer
- Auger

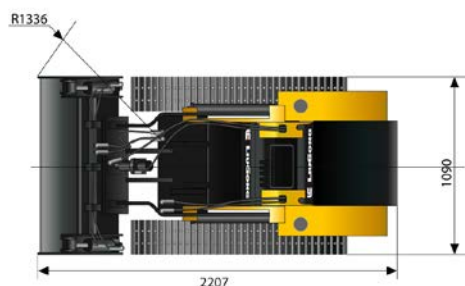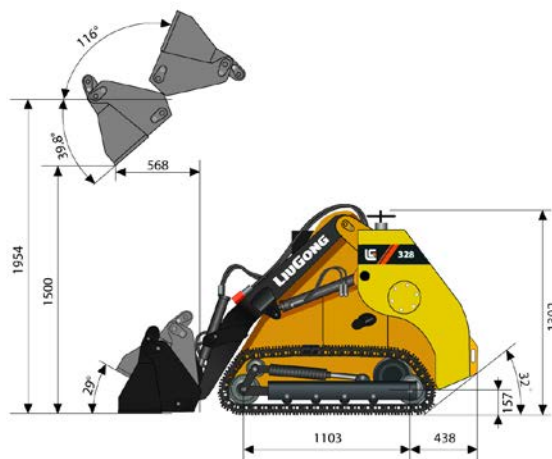

Unit:mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 388 6124 E: overseas@liugong.com
www.liugong.com

02/2013 Designed by LiuGong